

CERTIFICATE OF APPROPRIATENESS

Applicant: Rod P. Frego, agent for, Samuel J. Randall, owner

Property: 1208 Cortlandt Street, Lot 15, Block 189, Houston Heights East Subdivision. The property includes a historic two-story wood frame, 1,924 square foot single-family residence situated on a 6,600 square foot corner lot.

Significance: Contributing Modified L-Plan Queen Anne, constructed circa 1915, located in the Houston Heights East Historic District.

Proposal: New Construction – Garage

The applicant is proposing to construct a 34' x 24' two-story wood-trimmed detached garage with a standing seam metal roof. Existing accessory structure in the rear of the property is non original and will be demolished. Windows are to be inset and recessed.

Public Comment: No public comment received.

Civic Association: No comment received.

Recommendation: Denial. Doesn't meet criteria 1 and Houston Heights Design Guidelines.

HAHC Action:

All materials in exterior walls, including windows, siding, framing lumber, and interior shiplap must be retained except where removal or replacement has been explicitly approved by HAHC. Shiplap is an integral structural component of the exterior wall assembly in balloon framed structures and its removal can cause torquing, twisting and collapse of exterior walls. Shiplap may be carefully shored and removed in small portions to insulate, run wire or plumbing, and should be replaced when the work is complete. Maintenance and minor in-kind repairs of exterior materials may be undertaken without HAHC approval, but if extensive damage of any exterior wall element is encountered during construction, contact staff before removing or replacing the materials. A revised COA may be required.

CERTIFICATE OF APPROPRIATENESS

Basis for Issuance: HAHC Approval

Effective: June 29, 2023



PLANNING & DEVELOPMENT DEPARTMENT

COA valid for two years from effective date. COA is in addition to any other permits or approvals required by municipal, state and federal law. Permit plans must be stamped by Planning & Development Department for COA compliance prior to submitting for building or sign permits. Any revisions to the approved project scope may require a new COA.

NEW CONSTRUCTION IN A HISTORIC DISTRICT

Sec. 33-242(a): HAHC shall issue a certificate of appropriateness for new construction in a historic district upon finding that the application satisfies the following criteria:

S D NA

S - satisfies D - does not satisfy NA - not applicable

- (1) The distance from the property line of the front and side walls, porches, and exterior features of any proposed new construction must be compatible with the distance from the property line of similar elements of existing contributing structures in the context area;
- (2) The exterior features of the new construction must be compatible with the exterior features of existing contributing structures in the context area;
- (3) The scale and proportions of the new construction, including the relationship of the width and roofline, overall height, eave height, foundation height, porch height, roof shape, and roof pitch, and other dimensions to each other, must be compatible with the typical scale and proportions of existing contributing structures in the context area unless special circumstances, such as an atypical use, location, or lot size, warrant an atypical scale and proportions;
- (4) The height of the new construction must not be taller than the typical height of existing contributing structures in the context area unless special circumstances, such as an atypical use, location, or lot size, warrant an atypical height, except that;

(a) Design guidelines for an individual historic district may provide that a new construction with two stories maybe be constructed in a context area with only one-story contributing structures as long as the first story of the new construction has proportions compatible with the contributing structures in the context area, and the second story has similar proportions to the first story; and

(b) A new construction shall not be constructed with more than one story in a historic district that is comprised entirely of one-story contributing structures, except as provided for in design guidelines for an individual historic district.

HEIGHTS DESIGN GUIDELINES

- In accordance with Sec. 33-276, the proposed activity must comply with the City Council approved Design Guidelines.

HEIGHTS DESIGN GUIDELINES MEASURABLE STANDARDS

S D NA

S - satisfies D - does not satisfy NA - not applicable

Maximum Lot Coverage (Addition and New Construction)

LOT SIZE	MAXIMUM LOT COVERAGE
<4000	.44 (44%)
4000-4999	.44 (44%)
5000-5999	.42 (42%)
6000-6999	.40 (40%)
7000-7999	.38 (38%)
8000+	.38 (38%)


Existing Lot Size: 6,600
 Max. Allowed: 2,640
 Proposed Lot Coverage: 1,428
 Remaining Amount: 1,212

Maximum Floor Area Ratio (Addition and New Construction)

LOT SIZE	MAXIMUM FAR
<4000	.48
4000-4999	.48
5000-5999	.46
6000-6999	.44
7000-7999	.42
8000+	.40

Existing Lot Size: 6,600
 Max. FAR Allowed: 2,904
 Proposed FAR: 2,500
 Remaining Amount: 404

Side Setbacks (Addition and New Construction)



Note: This diagram shows just one example of a side setback configuration.

KEY	MEASUREMENT	APPLICATION
A	3 FT.	Minimum distance between side wall and the property line for lots less than 35 feet wide
B	5 FT.	Minimum distance between the side wall and the property line
	REMAINING	Difference between minimum side setback of 5 feet and minimum cumulative side setback
	6 FT.	Minimum cumulative side setback for lots less than 35 feet wide
C	10 FT.	Minimum cumulative side setback for a one-story house
	15 FT.	Minimum cumulative side setback for a two-story house

Proposed side setback (1): 3'-8"

Proposed side setback (2): 3'

Cumulative side setback: 6'-8"

Rear Setbacks (Addition and New Construction)


The City of Houston requires a minimum setback of three feet from the rear property line for all properties, except under the following circumstances:

- A front-facing garage which is located with its rear wall at the alley may have a zero-foot setback.
- An alley-loading garage generally must be located to establish a minimum of 20 feet of clearance from an opposing alley-loading garage door, the rear wall of a front-facing garage, or a fence; a 24-foot clearance is preferred.

Proposed rear setback: 19'

-
-
-


Detached Garage Ridge Height (New Construction)

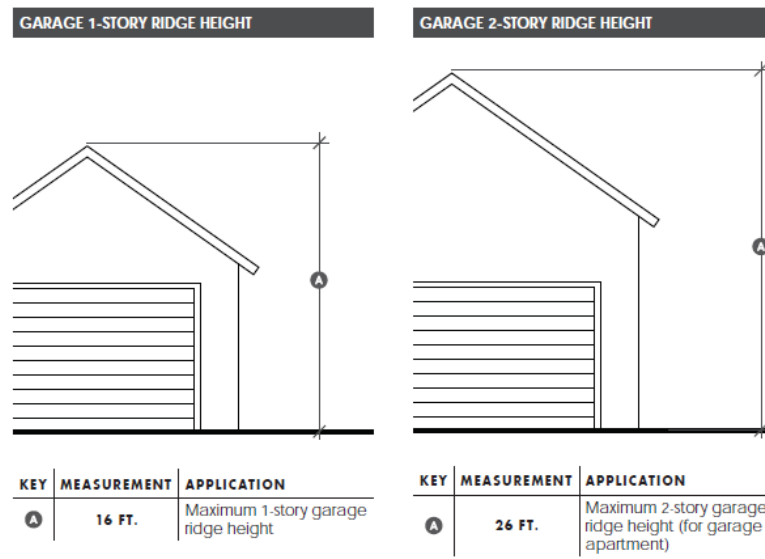

Proposed ridge height: 25'

-
-
-

Eave Height (Addition and New Construction)

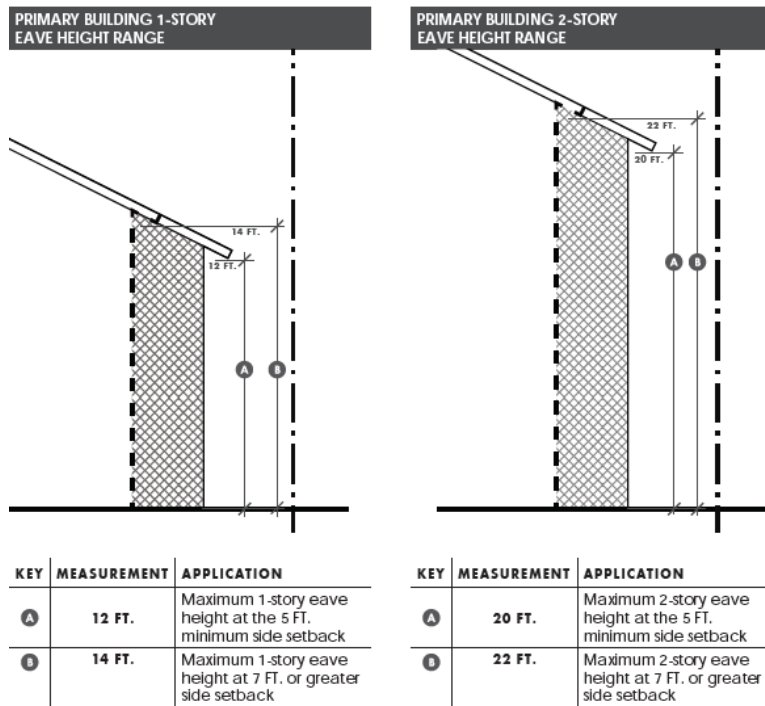

Proposed eave height: 19'




PROPERTY LOCATION
HOUSTON HEIGHTS EAST HISTORIC DISTRICT




Building Classification

- Contributing
- Non-Contributing
- Park

INVENTORY PHOTO

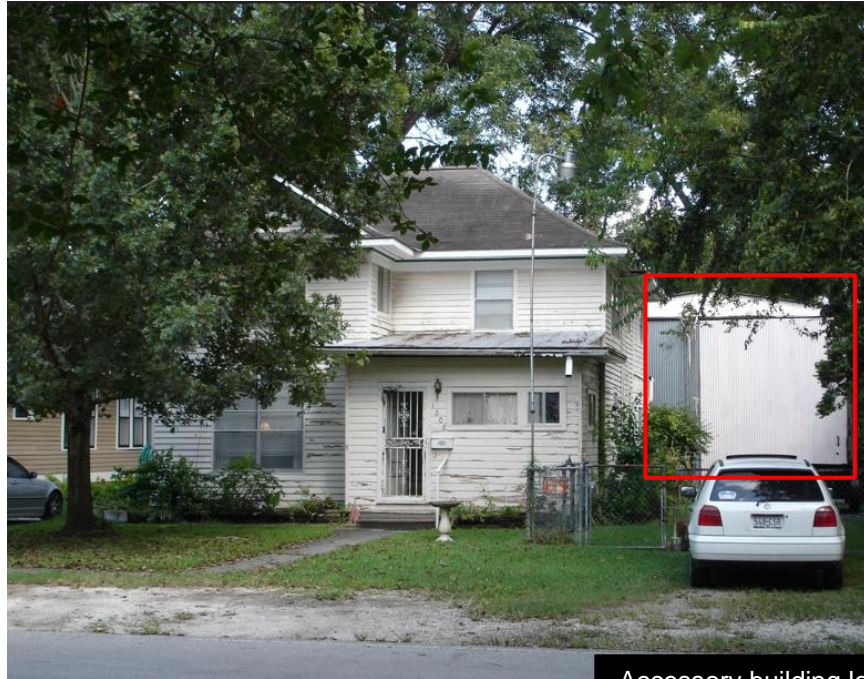


CURRENT PHOTO

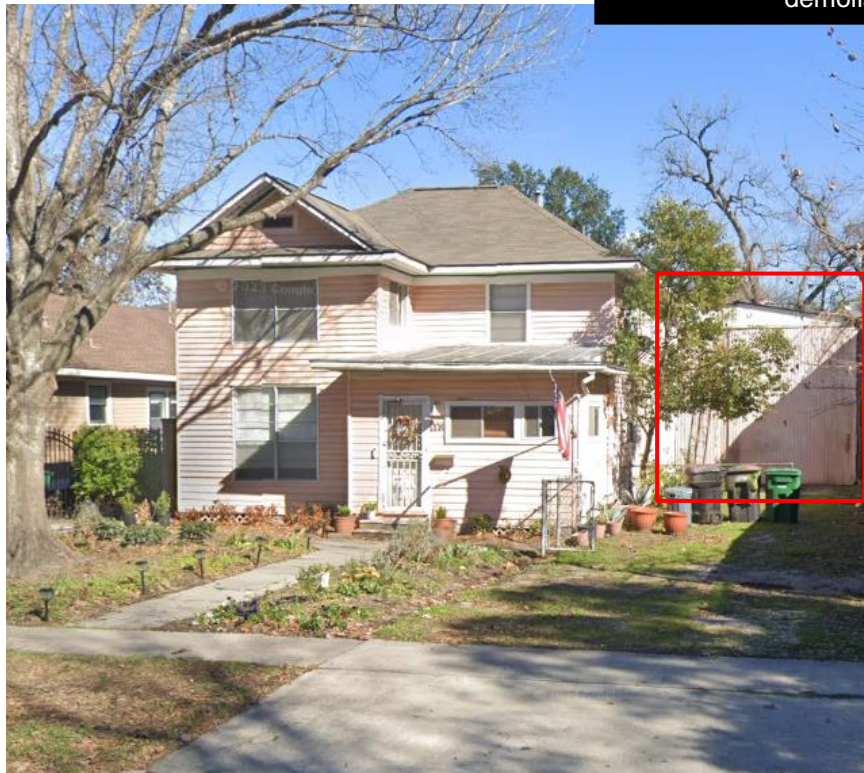


Accessory building located to the rear of the property is non original and will be demolished.


AERIAL VIEW OF PROPERTY

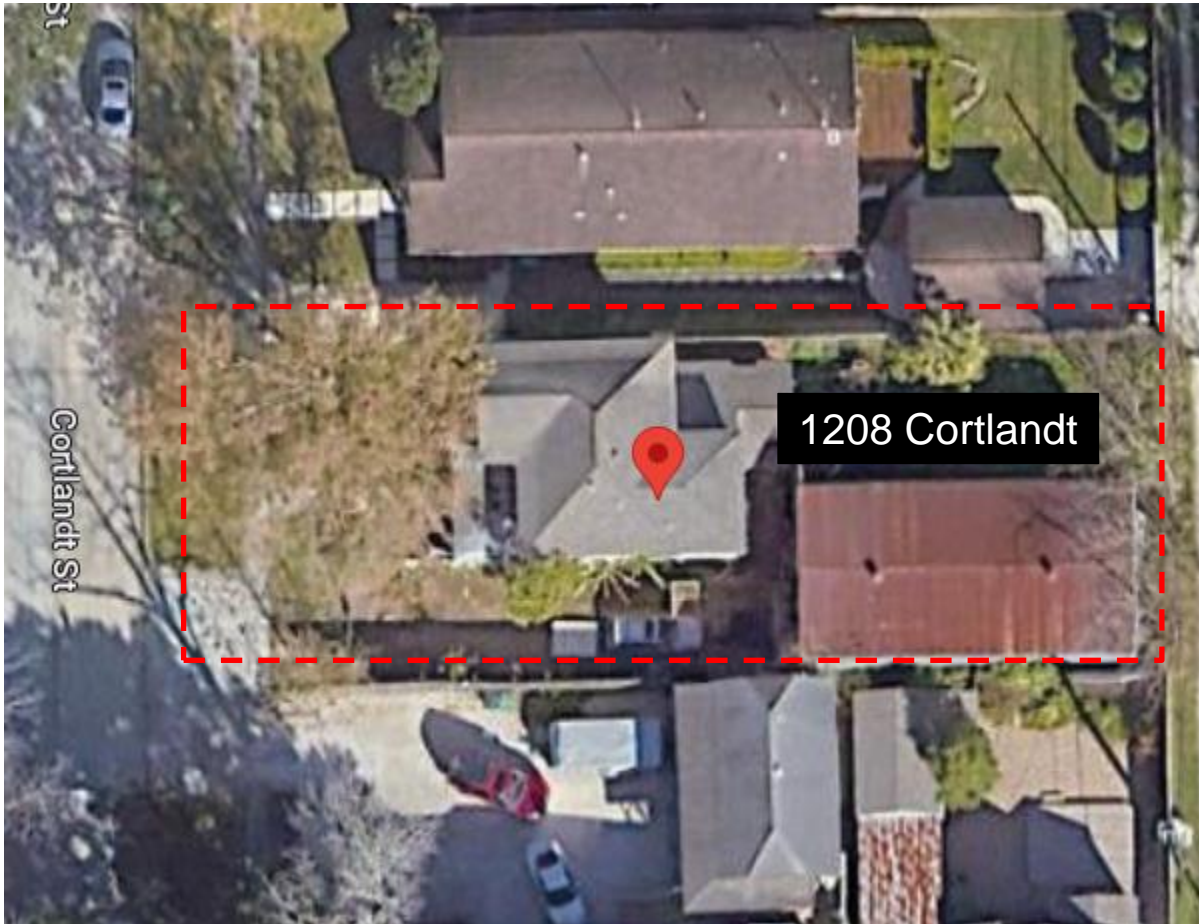

FLOOR PLANS

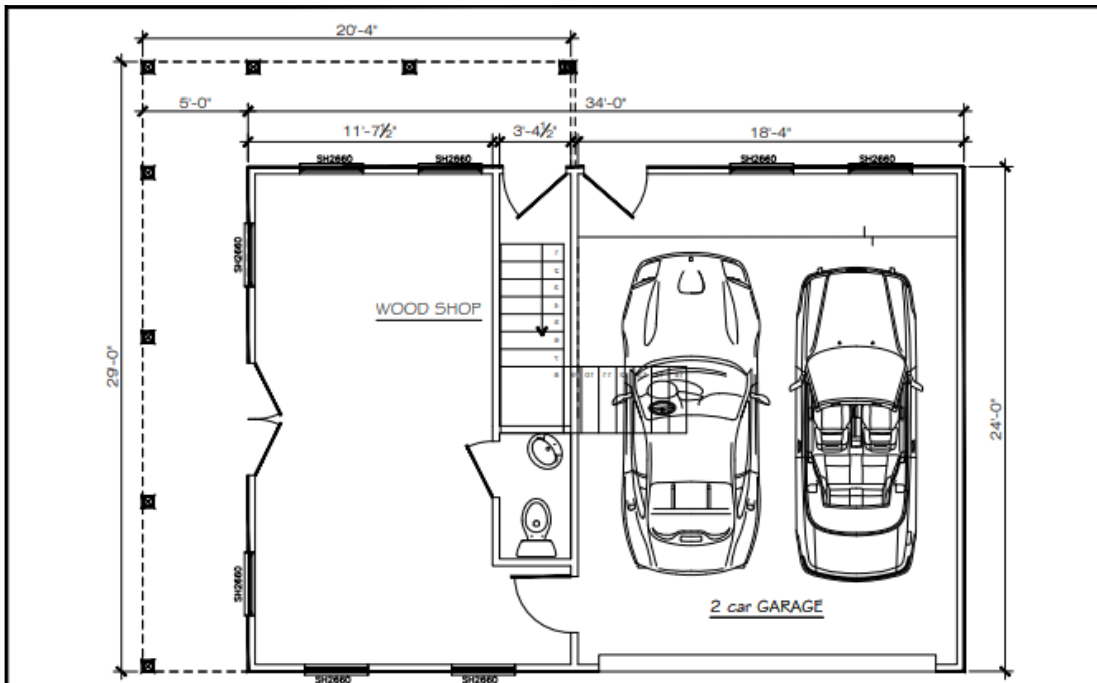


1 LEVEL 1 - PROPOSED GARAGE APT.
SCALE: 1/8" = 1'-0"

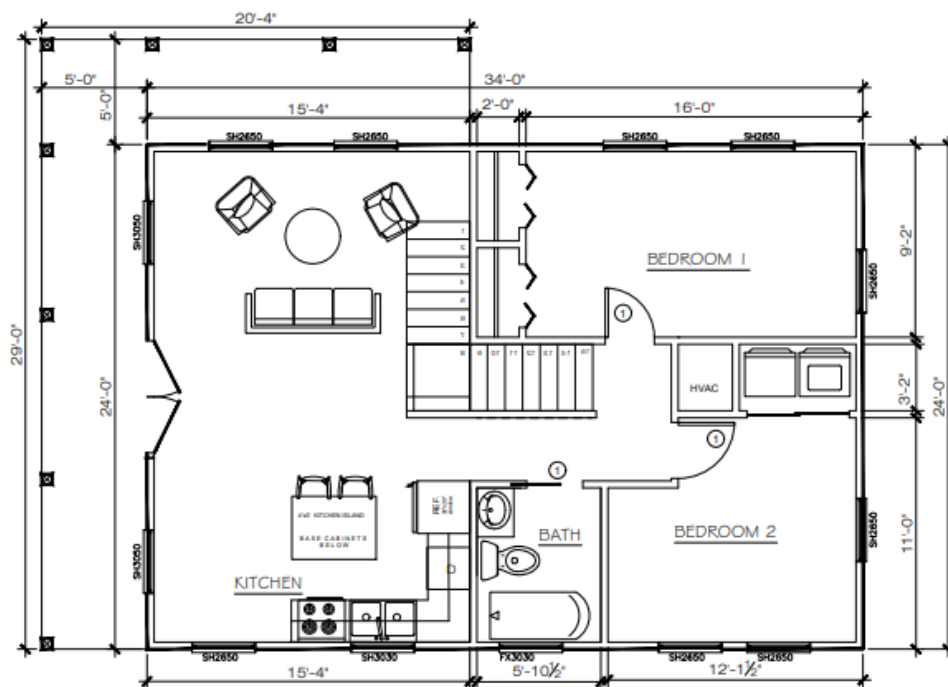

2 LEVEL 2 - PROPOSED GARAGE APT.
SCALE: 1/8" = 1'-0"

PROPOSED SITE PLAN

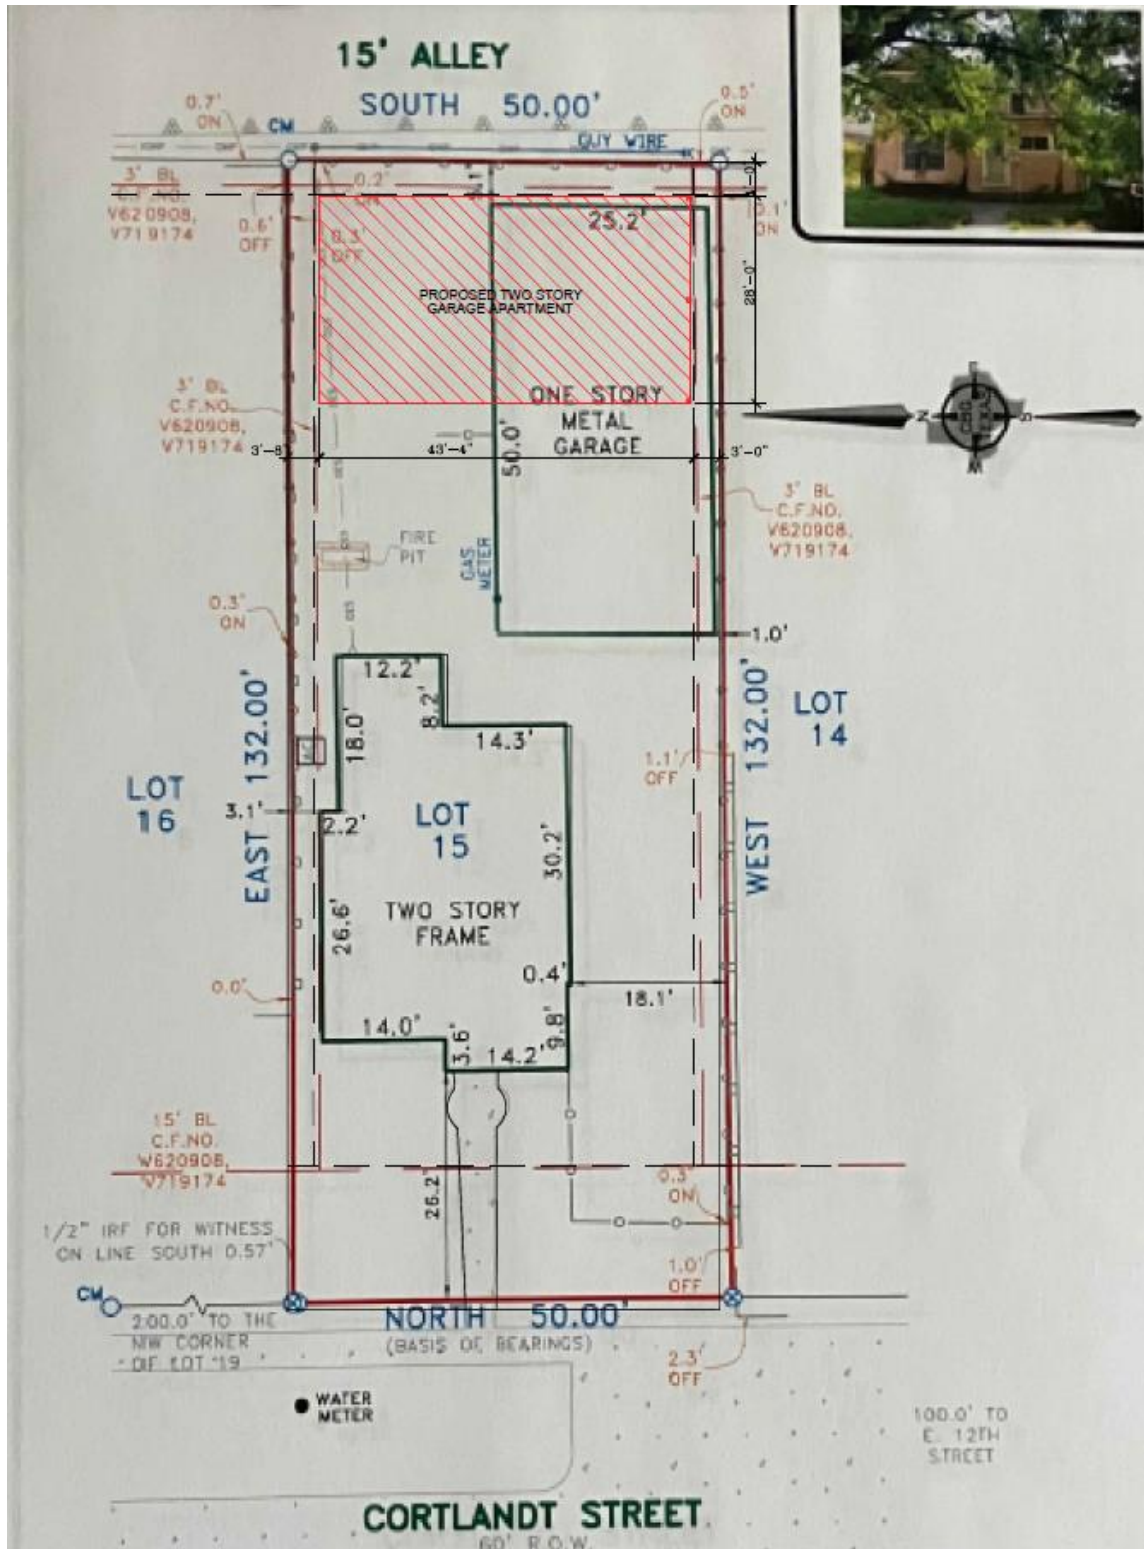

ELEVATIONS



1 GARDEN ELEVATION
SCALE: 1/8" = 1'-0"



4 SIDE ELEVATION
SCALE: 1/8" = 1'-0"



3 ALLEY ELEVATION
SCALE: 1/8" = 1'-0"




2 BALCONY SIDE ELEVATION
SCALE: 1/8" = 1'-0"



WINDOW WORKSHEET

WINDOW SCHEDULE					
MARK	SIZE		TYP.	QTY.	NOTES
	WIDTH	HEIGHT			
A	2'-6"	6'-0"	SINGLE HUNG	8	-
B	2'-6"	5'-0"	DOUBLE HUNG	11	-
C	3'-0"	3'-0"	DOUBLE HUNG	2	-
D	3'-0"	1'-6"	FIXED	2	TRANSOM WD.


DOOR AND FRAME SCHEDULE						
MARK	DOOR		QTY.			
	WD	HGT				
1	3'-0"	6'-8"	2		EXTERIOR	
2	16'-0"	7'-0"	1		GARAGE DOOR	
3	3'-0"	6'-8"	PAIR	PAIR	FRENCH DOOR	
4	2'-6"	6'-8"		3		
5	2'-0"	6'-8"		1	POCKET DR	
6	4'-0"	6'-8"		PAIR	BI FOLD	



TYPICAL WINDOW CONSTRUCTION

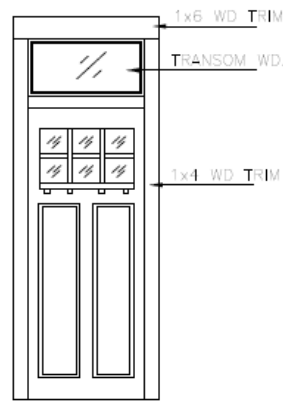

FRONT DR STYLE

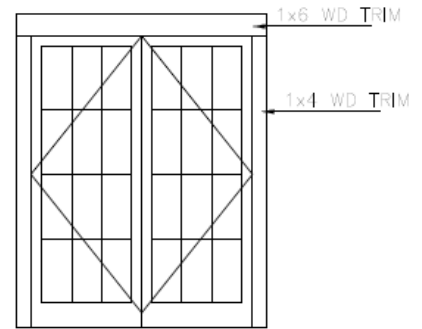

PORCH FRENCH DR.